


Product User Manual

Thank you for your purchase. Read manual carefully before use

WF-LC617-TD/TD V2

01 | Product introduction

- Appearance structure diagram

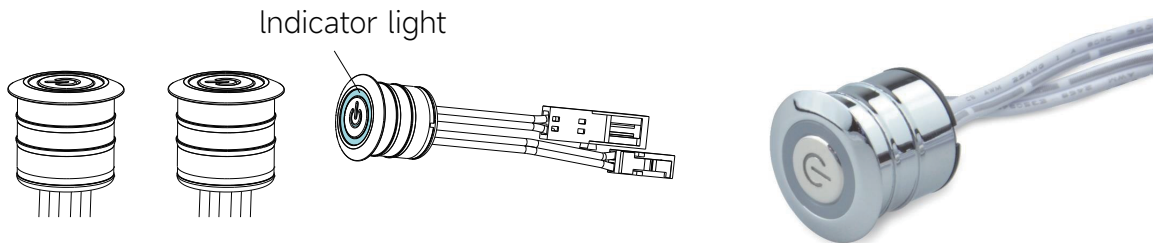


Model	Function Description	
WF-LC1617-TD	Connected to the LED Light , the light will turn on when short touch the sensor, the light will turn off when short touch again, long touch to adjust brightness	Without 3s gradually lighting on/off.
WF-LC1617-TD V2		With 3s gradually lighting on/off.


02 | Parameter

Input voltage	DC5-24V
Max. output current	3A
Max. load power	36W@12V
Installation way	Recessed (Hole size:φ16mmx 18mm)
Storage temperature	-20°C~+60°C
Working temperature	-20°C~+40°C
Flammability rating	94V0
RoHS	☒

03 | Instructions

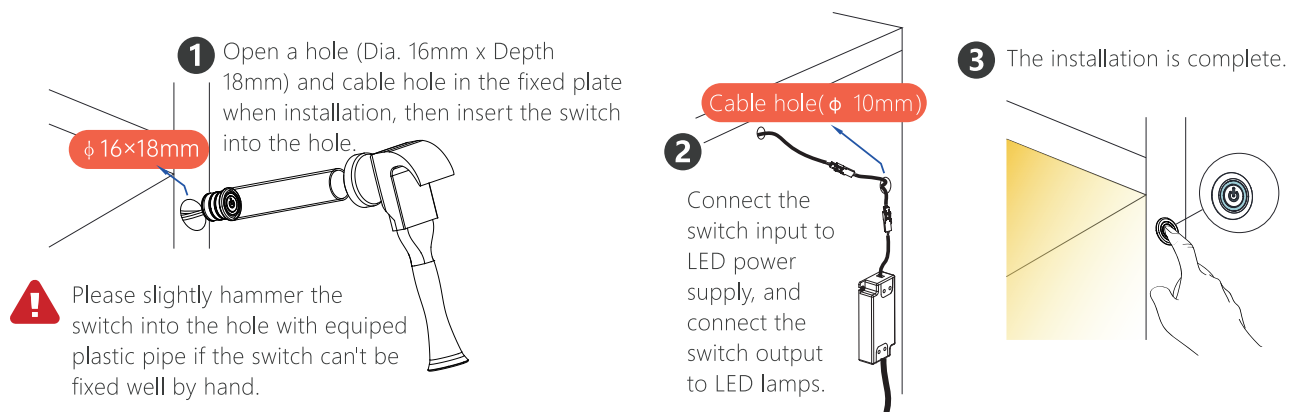

04 | Connection Diagram

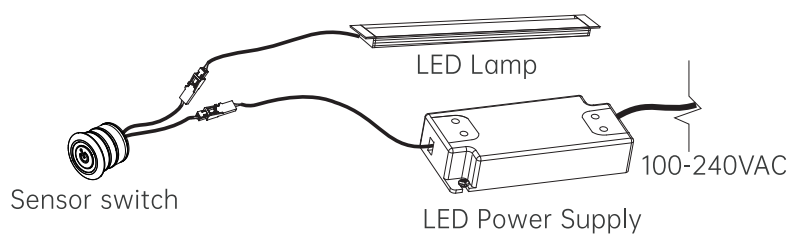

05 | 注意事项

- In order to use the product to achieve good effect it is recommended to use the dedicated power supply provided by our company.
- When the power is turned on again after initial power-on or power-off only the indicator light is on, and the lamp is not on.